

Manure Handling System for Reduction of Air Contaminants in a Swine Barn

Karen J. Stewart, Stephane P. Lemay, Claude Laguë, Ernest M. Barber and Trever Crowe
Prairie Swine Centre, Inc.

Summary

Two manure-handling systems, a washing gutter and an inclined washed conveyor belt, were tested to determine which system best eliminates all manure contamination from the experimental chambers in an air quality laboratory. Both systems proved efficient at reducing the air contamination from the excreta. However, neither system totally eliminated the release of contaminants to the airspace.

Introduction

Air quality in swine confinement buildings is a growing concern as the impact of poor air quality on the health of pigs and workers becomes better documented. Changes in barn design and management practices in the last 30 years have resulted in many improvements, but the problems associated with poor indoor quality in barns are far from being completely resolved. To understand better the sources of air contamination in an intensive swine operation, this study will look at various factors separately (i.e., feed, manure, and the animals themselves), and attempt to eliminate the effect of each factor on air quality. It is anticipated that once the effect of each factor is reduced to zero, these factors can then be varied individually to find out their effect on overall air quality. The first focus of the study was the manure handling system. Two methods of removing the manure were tested, one was a washing gutter using nozzles and pressurized water to clean the dunging area (Fig. 1), and the other was a washed, inclined conveyor belt (Fig. 2). The objective was to attain zero air contamination from the manure in the room using these manure handling systems.

Results

The average ammonia emissions from the washing gutter and the conveyor belt rooms were $48.7 \text{ mg day}^{-1} \text{ kg}_{\text{pig}}^{-1}$ and $57.0 \text{ mg day}^{-1} \text{ kg}_{\text{pig}}^{-1}$, respectively. Even though these emissions were 38% and 47% lower than previous observations from grower-finisher rooms with a conventional pit-plug design in the same swine building, both systems failed to achieve near zero ammonia emissions. There were no differences at a statistically significant level ($P > 0.05$) between the ammonia emissions from the two manure handling systems nor among the three frequencies tested (Fig. 3).

Implications

Another manure handling system will have to be found to achieve zero contamination levels for testing of the origin of contaminants. The washing gutter system is recommended for health and productivity testing with a range of contamination levels, as it was simpler and easier to operate than the conveyor belt system.

Acknowledgments

Strategic funding for this project was provided by SaskPork, Alberta Pork, Manitoba Pork and Saskatchewan Agriculture and Food Development Fund. Project funding was provided by NSERC and Cement Association of Canada.



Figure 1. Water nozzles used to wash the manure from the gutter portion of the pen.



Figure 2. Conveyor belt system used to remove manure from the pen.

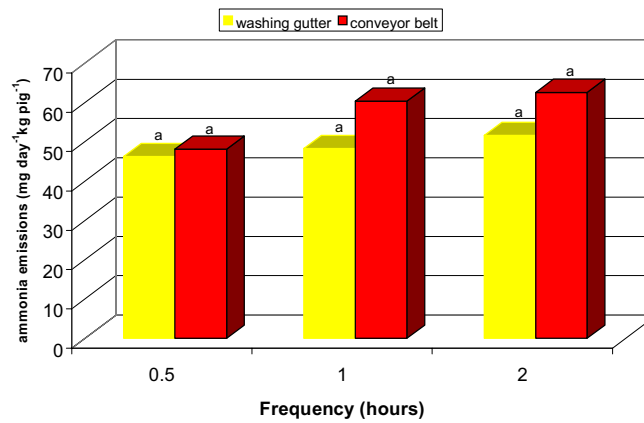


Figure 3. Average ammonia emissions from the experimental chambers over all the trials. Averages followed by the same letter are not significantly different ($P>0.05$).